



SCREW T.T. M16x30 UNI 5732-8.8
 NUT E. M16 UNI 5588-6S
 WASHER 18x36 UNI 6592

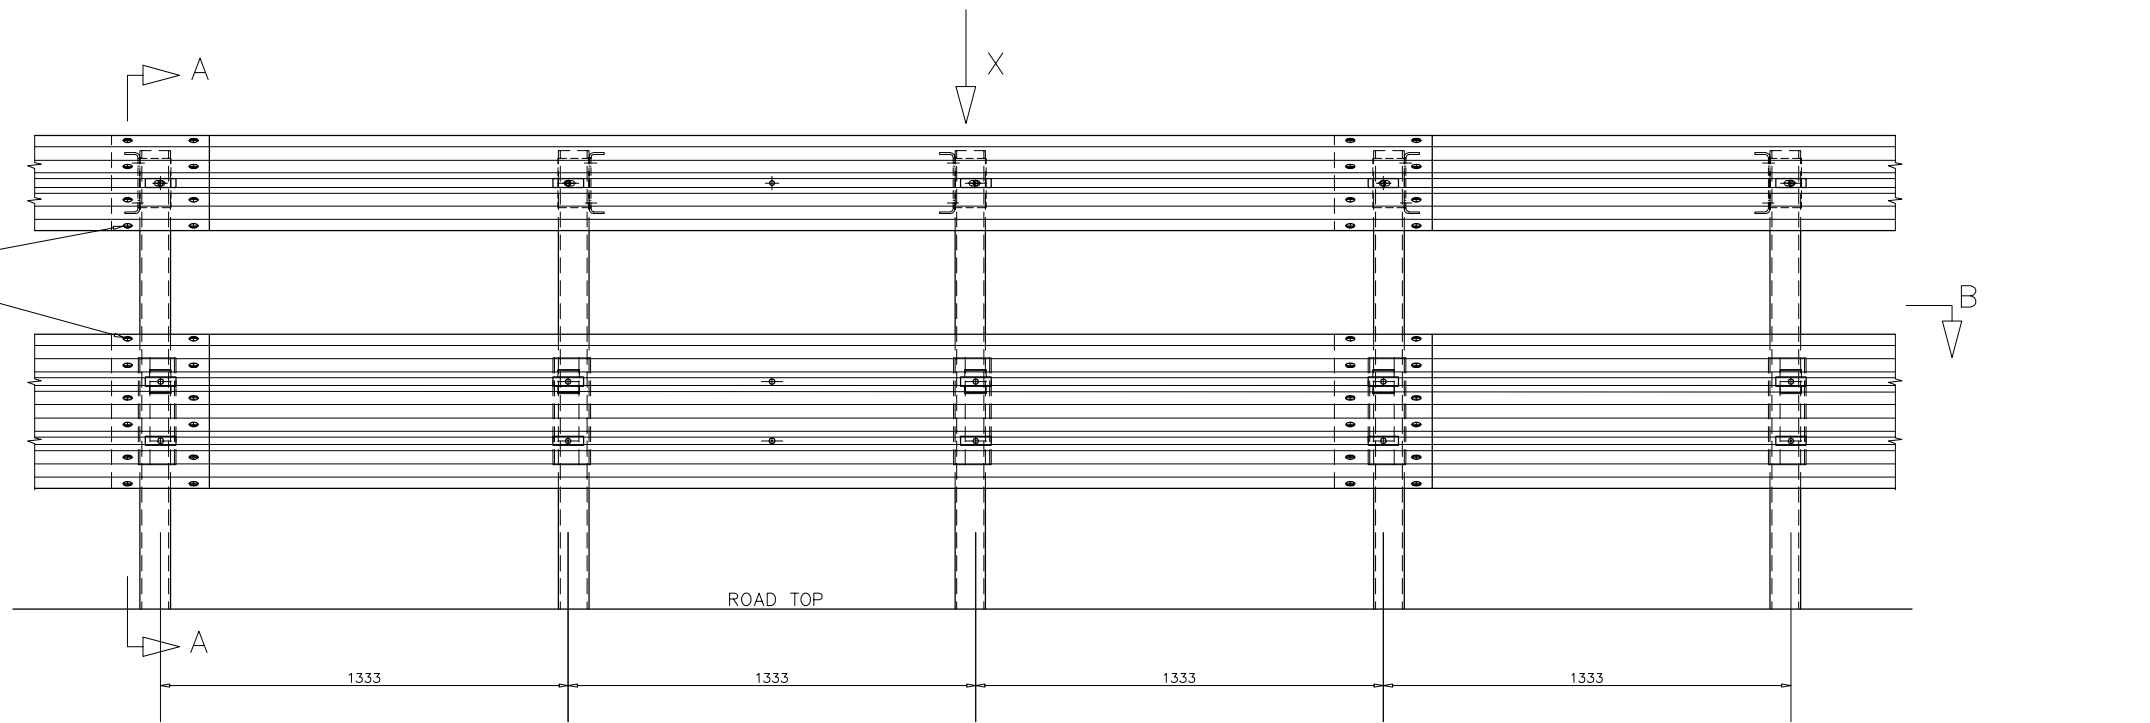


SECTION B-B
 TRIPLE CORRUGATED BEAMS VIEW

TRAFFIC DIRECTION

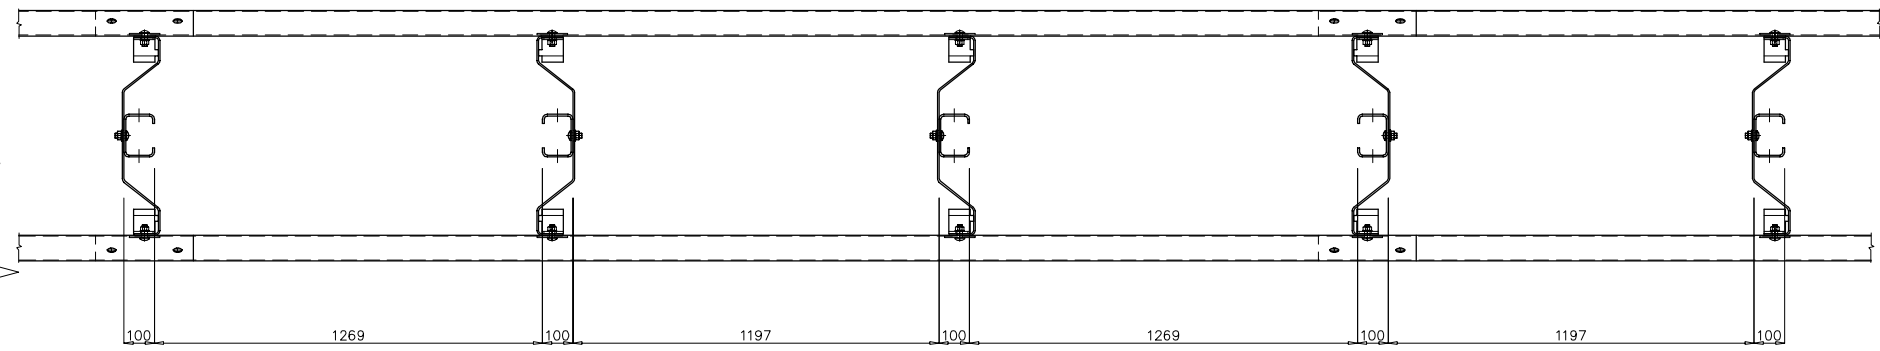

VIEW FROM X
 DOUBLE CORRUGATED BEAMS VIEW

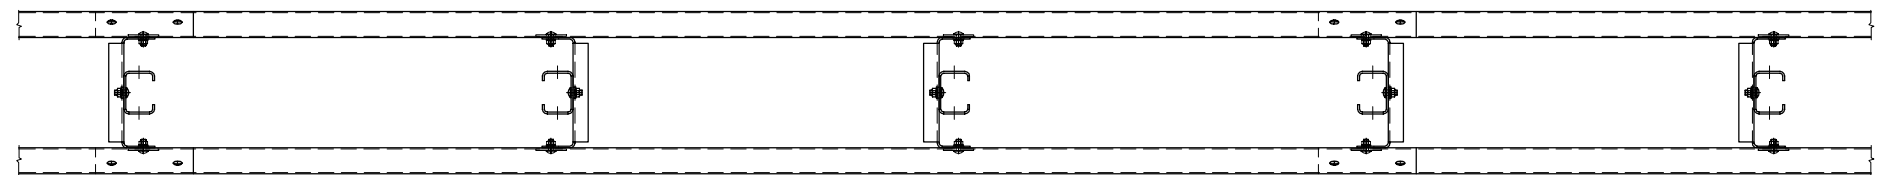

TIGHTENING COUPLES:

- ALL M16 BOLTS EXCEPT SPACER/POST JUNCTION BOLTS - Kgm 17,4
- SPACER/POST JUNCTION M16 BOLTS Kgm 10,0
- BOLT M8x25 Cl. 5.8 - Kgm 0,80